


NEW

BENEITO FAURE®


ALFA ALUMINIUM 32W 220-240V 45° LED CREE PROYECTOR PARA CARRIL

3-PHASE ADAPTER INCLUDED  
ADAPTADOR TRIFASICO INCLUIDO

LIFUD DRIVER

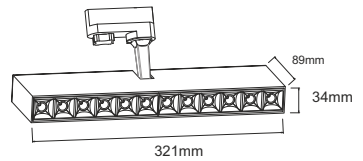

UGR <19



CODE	COLOR	CCT	LUMENS	POWER	VOLTAGE	ANGLE	PF	A	Hz	LIFETIME	RA	IP
4038	○ WHITE	2.700 K	3.100	32W	220-240V	45°	> 0,9	0,14	50/60	30.000h	80	20
4039	○ WHITE	3.000 K	3.200	32W	220-240V	45°	> 0,9	0,14	50/60	30.000h	80	20
4040	○ WHITE	4.000 K	3.250	32W	220-240V	45°	> 0,9	0,14	50/60	30.000h	80	20
4176	● BLACK	2.700 K	3.100	32W	220-240V	45°	> 0,9	0,14	50/60	30.000h	80	20
4177	● BLACK	3.000 K	3.200	32W	220-240V	45°	> 0,9	0,14	50/60	30.000h	80	20
4178	● BLACK	4.000 K	3.250	32W	220-240V	45°	> 0,9	0,14	50/60	30.000h	80	20

